

REMOVE ALL BURRS & SHARP EDGES

IF IN DOUBT ASK!

3RD ANGLE PROJECTION

STANDARD SPEC


- WIDE BEAM REFLECTOR
- EXTERNAL CONTROL GEAR BOX READ (FOR HPS & MBI-T LAMP MODELS)
- IP66/67 RATING

OPTIONS

- PTFE COATING
- NARROW BEAM REFLECTOR
- SUBMERSIBLE OPTION
- ZONE 2 EXN VERSION
- SUBMERSIBLE OPTION

ACCESSORIES(ORDERED SEPARATELY)

- POLE-MOUNTED BRACKET KIT
- SWINGING JIB BRACKET KIT
- ANTI-GLARE SHIELD KIT
- WIRE GUARD KIT

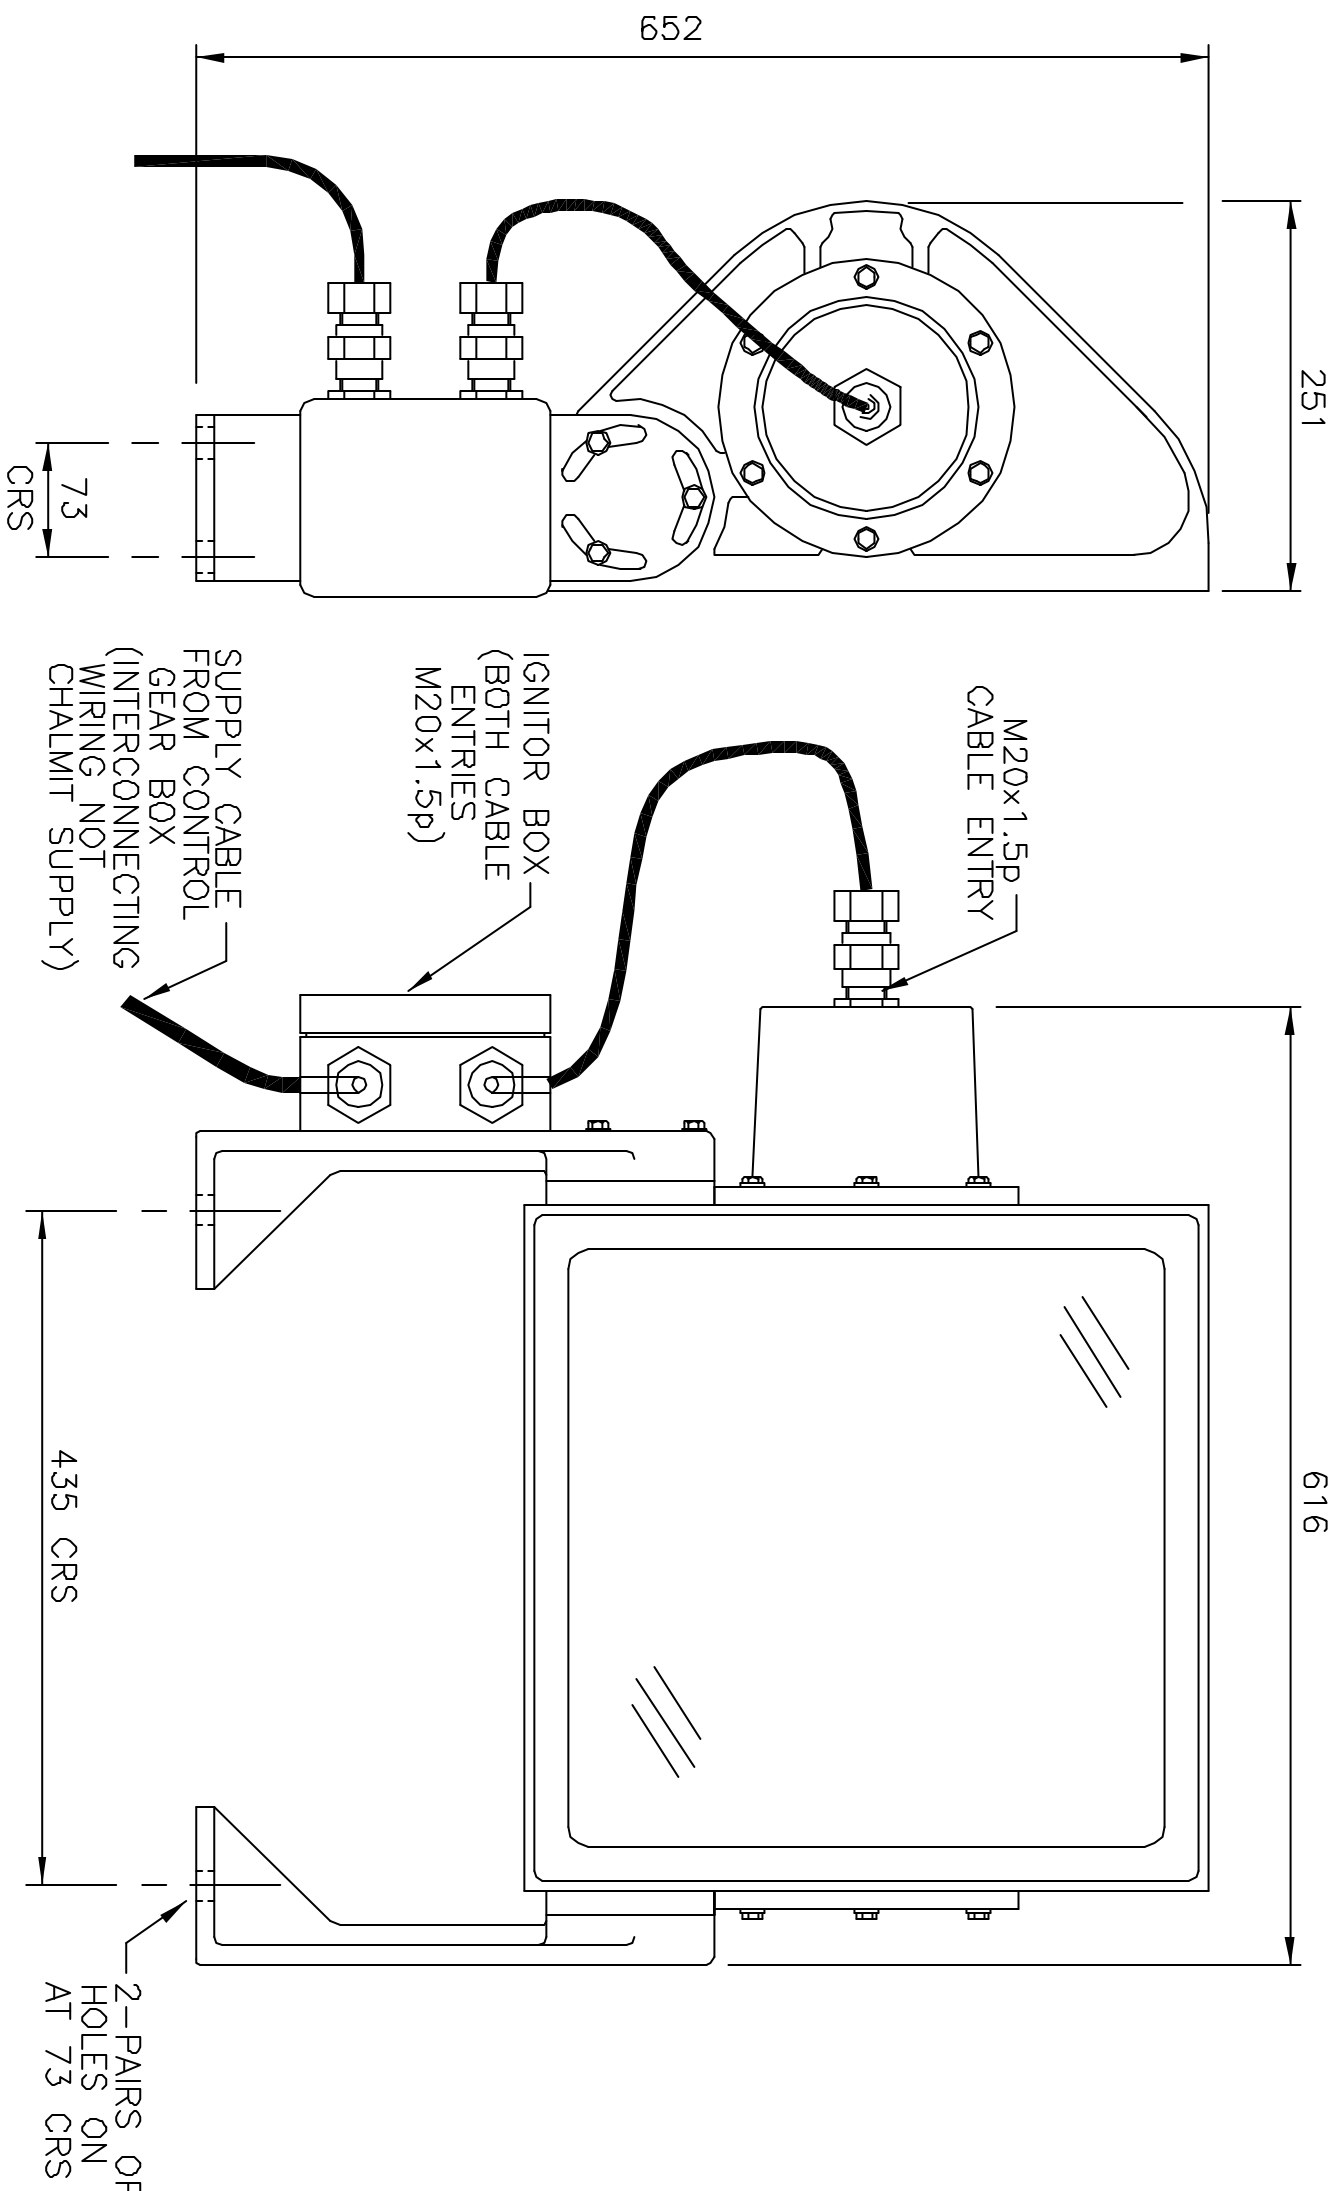

LAMP	WATTAGE	VOLTAGE	LAMP BASE	WEIGHT
HPS	600W	220-254V 50-60HZ	E40	25Kgs
HPS	2x400W			
HPS	1000W	254V Max ac/dc	E40	25Kgs
T/HAL	1000W			
MBI-T	2000W	220-254V 50-60HZ	E40	25Kgs

LAMP RANGE

INCOMING CABLE
2.5mm² SOLID OR
4mm² STRANDED CABLE

CHANGE	DCP NO	MOD BY	TOLERANCE	DATE	TITLE
			N.T.S		503 Floodlight
					Chalmit Lighting 388 Hillington Road, Glasgow G52 4BL Scotland Tel:0141 882 5655 Fax:0141 883 3704

DRAWN	K.B.	DATE	10/06/02	FINISH	N/A	SCALE	-	DRAWING NUMBER/SHEET NUMBER	F1061 1 OF 1
CHECKED				MATERIAL	STAINLESS STEEL				
APPROVED									
REF. DRGS.									