1	2	3	4	5	6	7	8
DRAWING NUMBER/SHEET NUMBER f1090							

REMOVE ALL BURRS & SHARP EDGES

IF IN DOUBT ASK!

3RD ANGLE PROJECTION

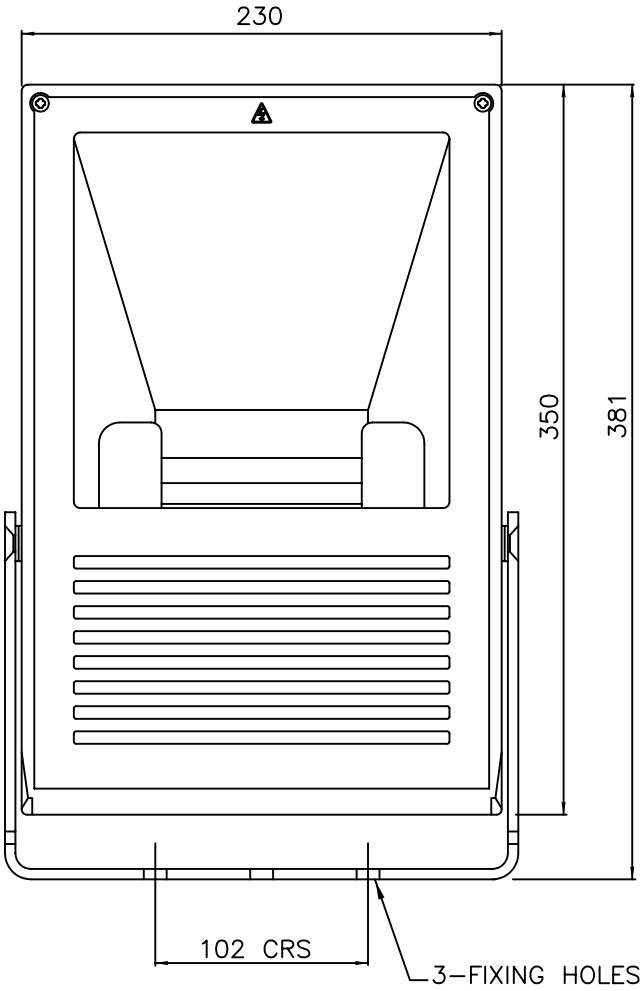

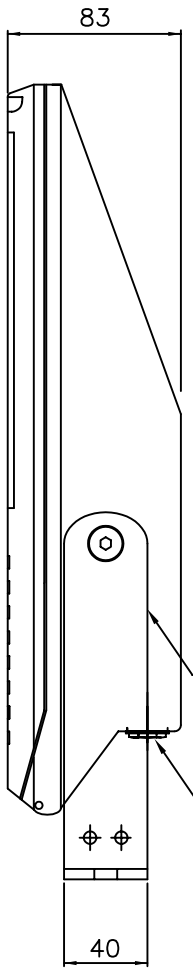

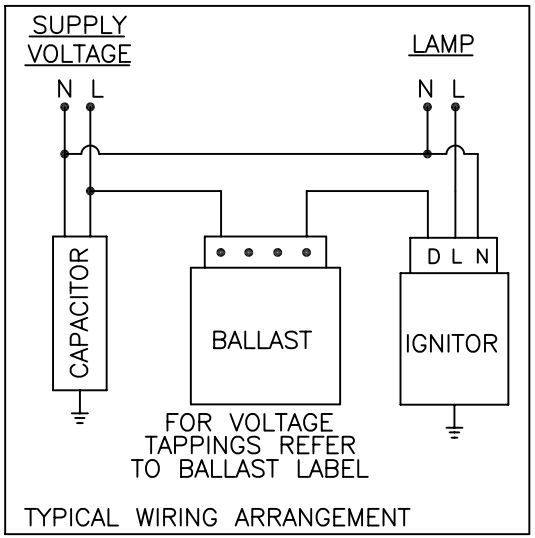

Product Name	Stirrup Mounted Micronex Floodlight
Ex Classification	Ex n Restricted Breathing
Ex code	II 3 G Ex nR II T4
Voltage & Frequency	200–254V @ 50Hz or 210–254V @ 60Hz
Lamp Type	SON–TD or MBI–TD
Lamp Wattage	70W

Catalogue No	T Class	T amb	Weight	Windage
70W SON–TD	T4	40°C	5.0Kg	0.03m^2
70W MBI–TD				

OPTIONS

i) STAINLESS STEEL MOUNTING STIRRUP
ii) POLE MOUNTING BRACKET
iii) NARROW BEAM REFLECTOR

SUPPLY CABLE
6mm^2 (3–CORE)

DCF No	MOD BY	CHANGE	ISSUE	DATE

Chalmit Lighting

Chalmit Lighting
388 Hillington Road,
Glasgow G52 4BL
Scotland
Tel:0141 882 5555 Fax:0141 883 3704

DRAWN	J.T.C.
CHECKED	J.T.C.
APPROVED	J.T.C.
DATE	27/06/2002

REF. DRGS.–

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

MATERIAL	TOLERANCE
FINISH	SURFACE ROUGHNESS
DIMS. IN MM	SCALE –

TITLE
Micronex Ex n 70W
SON–TD/MBI–TD Lamp
Stirrup Mounted

DRAWING NUMBER/SHEET NUMBER
f1090 1 OF 1