1	2	3	4	5	6	7	8

DRAWING NUMBER/SHEET NUMBER
H010401

REMOVE ALL BURRS & SHARP EDGES

IF IN DOUBT ASK!

3RD ANGLE PROJECTION

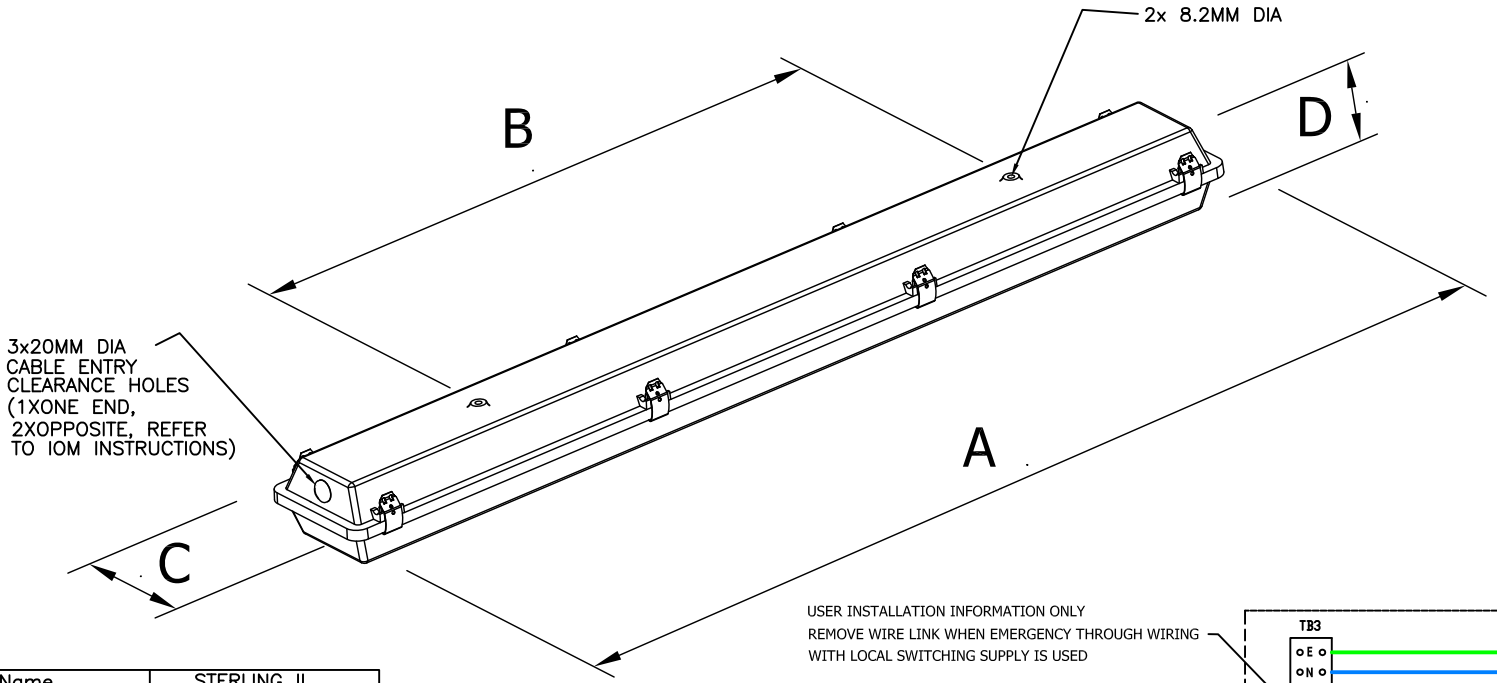

Product Name	STERLING II
Voltage & Frequency	120–254V
Degree of Protection	IP65

CERTIFICATE No(s): SIRA06ATEX4348X
IECExSIR 06.0108X

CODING: Ex II 3 GD ExnA II T4

AMBIENT TEMP: –20C To (REFER TO CERTIFICATE & INSTALLATION & OPERATIONS MANUAL)

NOTES:

A) BODY: STAINLESS STEEL 316
B) DIFFUSER : POLYCARBONATE
C) CLIPS : STAINLESS STEEL
D) LUMINAIRE SUSPENSION: WASHERS ARE PROVIDED TO ACHIEVE IP65 RATING
E) CABLE ENTRY: 3 X 20 mm
F) CABLE: SUITABLE FOR UP TO 4.0 mm SQ.
G) POWER FACTOR : GREATER THAN 0.98

LUMINAIRE TYPE	DIMENSION 'A'	'B'	'C'	'D'	NO OFF RETAINING CLIPS	WEIGHT
SS2N/118/BI	702	500	172	106	6 OFF	3.6KG
SS2N/136/BI	1312	800	172	106	8 OFF	4.2KG
SS2N/158/BI	1612	1100	172	106	10 OFF	6.1KG

USER INSTALLATION INFORMATION ONLY
REMOVE WIRE LINK WHEN EMERGENCY THROUGH WIRING WITH LOCAL SWITCHING SUPPLY IS USED

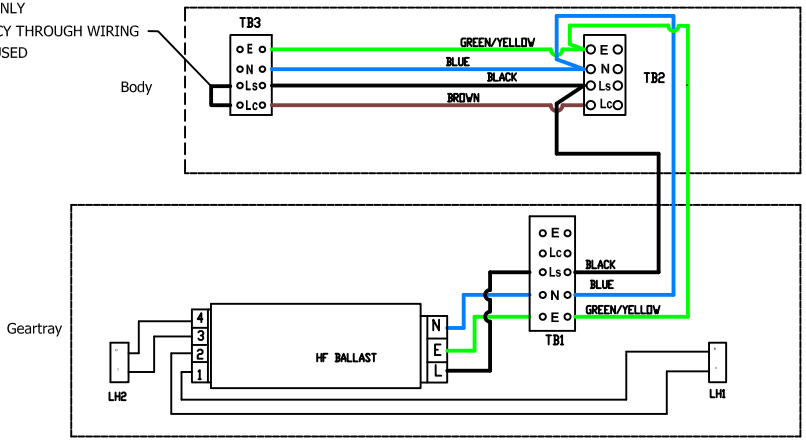

SINGLE LAMP NON EMERGENCY WIRING

DCF No	MOD BY	CHANGE	ISSUE	DATE

Chalmit Lighting

Chalmit Lighting
388 Hillington Road,
Glasgow G52 4BL
Scotland
Tel:0141 882 5555 Fax:0141 883 3704

DRAWN	SLEE
CHECKED	
APPROVED	
DATE	02.10.07
REF. DRGS.–	

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

MATERIAL	SEE NOTES	TOLERANCE	
FINISH	Finish	SURFACE ROUGHNESS	
DIMS. IN	MM	SCALE –	

TITLE
STERLING II–SS2N/1X18–58W
NON EMERGENCY HF RANGE
STAINLESS STEEL BODY TYPE

DRAWING NUMBER/SHEET NUMBER
H010401 1 OF 1