DRAWING NUMBER/SHEET NUMBER
F2607

REMOVE ALL BURRS & SHARP EDGES

IF IN DOUBT ASK!

3RD ANGLE PROJECTION

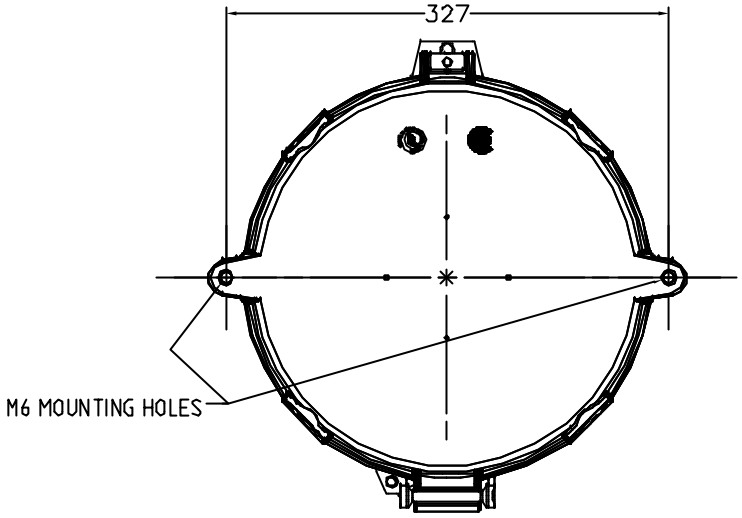

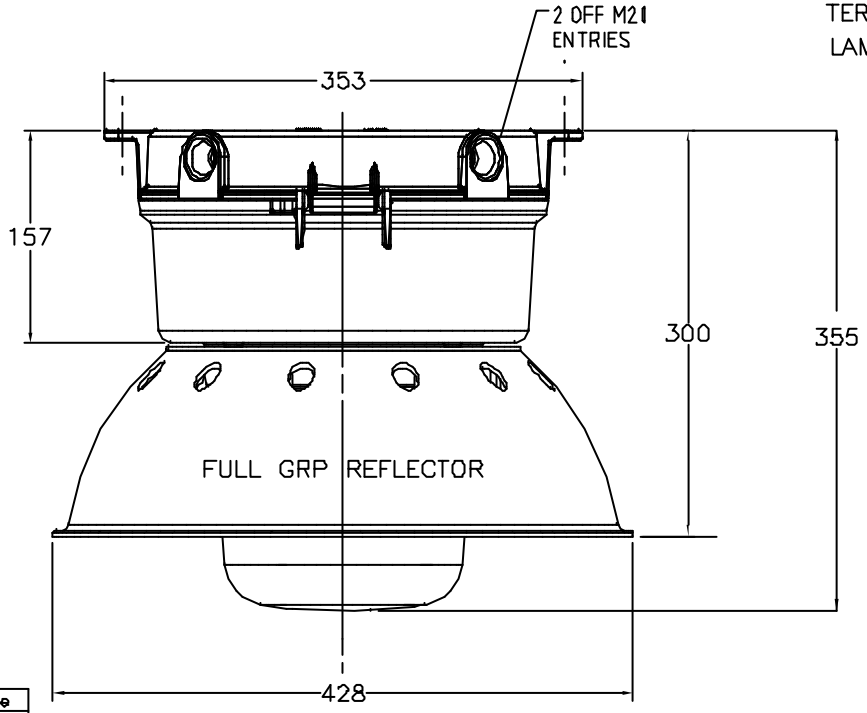

CAT NO.	WATTAGE	LAMP	LAMPHOLDER	AMBIENT TEMP.	T RATING	APPROX WEIGHT
EC2N/125/MV	125W	MBFU	E27	45°C	T3	8 Kgs

TYPE OF PROTECTION....EEx nA R (NON SPARKING) (RESTRICTED BREATHING ENCLOSURE)
AREA CLASSIFICATION.....ZONE 2 AREAS TO BS EN 60079-14
STANDARD.....BS EN 60079-15
CERTIFICATE.....ATEX TYPE EXAMINATION BaseefaATEX0393X
CODE II 3G EEx nA R II T(SEE TABLE) Tamb(SEE TABLE)
INGRESS PROTECTION....IP65 TO BS EN60529 (IEC 529)
CONTROL GEAR.....INTERNAL COPPER/IRON & INTERNAL PFC CAPACITOR
VOLTAGE RANGE :..... 240V-50 Hz
TERMINATION:.....LOOPING UP TO 6mm^2 3-CORE CABLE AS STANDARD
LAMP TYPE.....125W MBFU (ES) - PART NO: U5183-0125

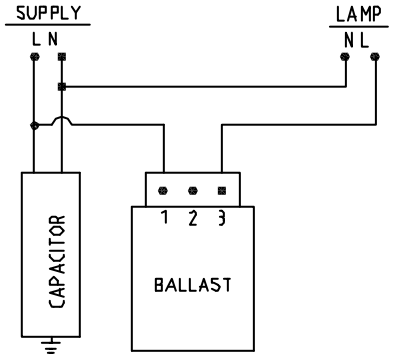

WIRING DIAGRAM

PROJECT REF: VASAI EAST DEVELOPMENT

DOF No	MOD BY	CHANGE	ISSUE	DATE

Chalmit Lighting

Chalmit Lighting
388 Hillington Road,
Glasgow G52 4BL
Scotland
Tel:0141 882 5555 Fax0141 883 3704

DRAWN	sigg
CHECKED	pbeynon
APPROVED	pbeynon
DATE	22/02/2007

REF. DR98.-

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

MATERIAL	N/A
FINISH	N/A
DIMS. IN	MM
TOLERANCE	
SURFACE ROUGHNESS	
SCALE	-

TITLE
EC2N/125/MV
125W MBFU
CEILING MOUNTED

DRAWING NUMBER/SHEET NUMBER
F2607 1 OF 1