DRAWING NUMBER/SHEET NUMBER
F1089

REMOVE ALL BURRS & SHARP EDGES

IF IN DOUBT ASK!

3RD ANGLE PROJECTION

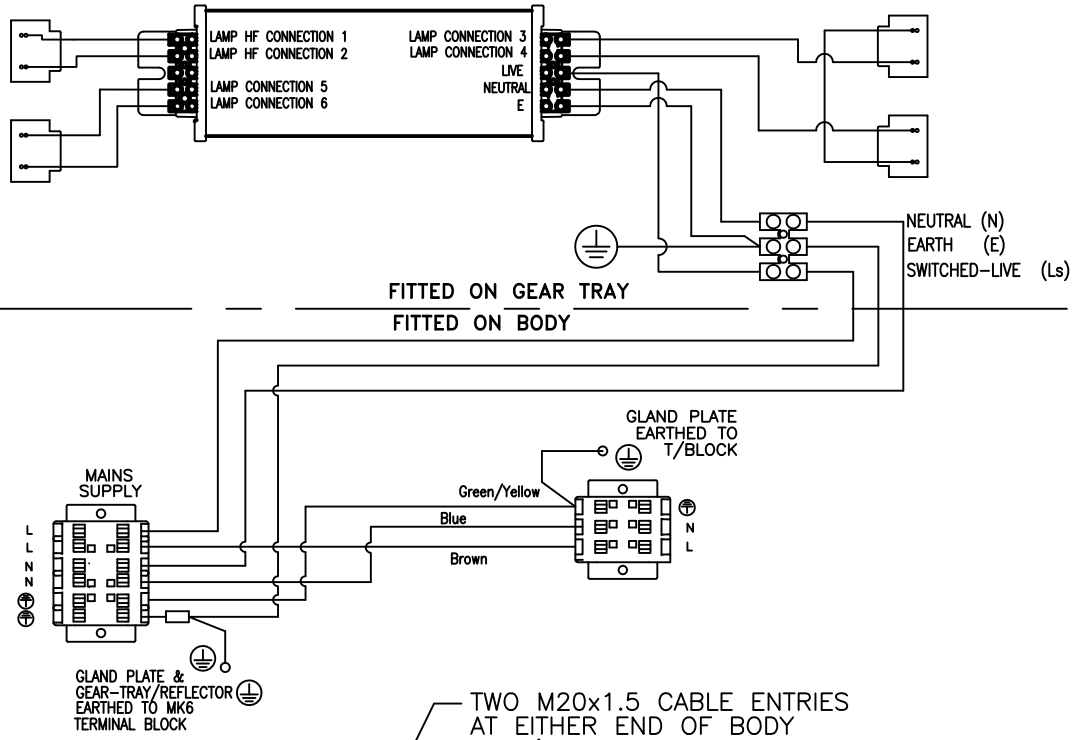

LUMINAIRE	'A'	'B'	WEIGHT	CODING
PRGN/118/BI	742	400	5.9Kg	Ex II 3 G D EEx nA T4 @ 50°C
PRGN/218/BI			6.2Kg	
PRGN/136/BI	1352	700	9.6Kg	
PRGN/236/BI			10Kg	

NOTES

1) THE TERMINAL BLOCKS SHOWN ON THE WIRING DIAGRAM ALLOW FOR SINGLE ENTRY,LOOPING & THRO' WIRING FOR MAINS SUPPLY.
2) SUITABLE FOR 3 CORE 6mm SQ. INCOMING CABLE AS STANDARD
3) THRO' WIRING IS STANDARD ON ALL MODELS.
4) BATTERY IS CONTAINED INSIDE THE BODY
5) THERE ARE TWO M8 THREADED BRASS BUSHES INSERTED INTO THE GRP BODY FOR MOUNTING TO CEILING. (SEE DIMENSION 'B')
6) BI-PIN LAMPHOLDERS ARE STANDARD.

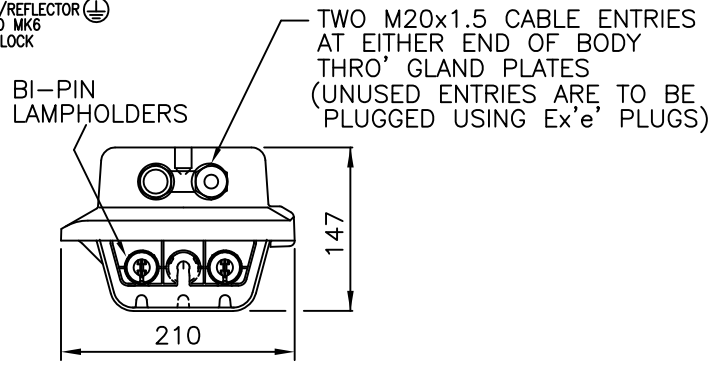

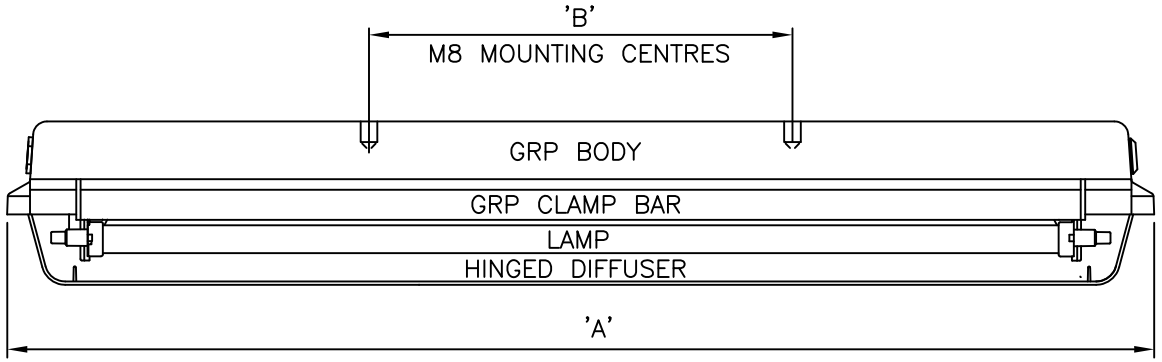

Product Name	Protecta Ex n Fluorescent
Ex Classification	Ex nA (Non-sparking) Dust protected enclosure
Ex code	Ex II G D EEx nA II T4
Certificate	BAS01ATEX3276
Voltage & Frequency	220-240V @ 50/60Hz
Degree of Protection	IP66/67 BS EN 60529

DCF No	MOD BY	CHANGE	ISSUE	DATE

DRAWN	J.T.C.
CHECKED	J.T.C.
APPROVED	J.T.C.
DATE	27/06/2002

REF. DRGS.-

WITHOUT OUR PERMISSION THIS DRAWING, WHICH IS OUR COPYRIGHT, MAY NOT BE REPRODUCED OR MADE AVAILABLE TO THIRD PARTIES.
AUTHORISATION IS GIVEN TO ..... TO REPRODUCE THIS DRAWING FOR INTERNAL PURPOSES ONLY.

MATERIAL	GRP
FINISH	N/A
DIMS. IN	MM
TOLERANCE	1
SURFACE ROUGHNESS	
SCALE	-

Chalmit Lighting

Chalmit Lighting
388 Hillington Road,
Glasgow G52 4BL
Scotland
Tel:0141 882 5555 Fax:0141 883 3704

TITLE
PROTECTA N NON EMERGENCY GA & 2 X 18-36W HF FLUORESCENT SURFACE MOUNTED

DRAWING NUMBER/SHEET NUMBER
F1089 1 OF 1